

ROTARY RACK OVEN

USE

- Rack oven for 400 x 800 or 460 x 800 mm tray size

CONSTRUCTION

- Oven front, baking chamber and heating elements in stainless steel
- Insulation by means of glass wool mattresses
- Window with double glass
- Electrical harnesses made of high temperature silicone wires
- Fitted with 2 electric steam dampers
- Door handle right or left (to be specified at time of order)
- Stainless steel access ramp of 650 mm

ACCESSORIES

- Exhaust hood with or without fan
- 2 speed ventilat ion fan
- Electromechanical controls with steam injection timer

GENERAL FEATURES

Height

Front	2200 mm
Overall	2410 mm

Width

Front	1260 mm
-------	---------

Depth

Overall	1800 mm
Door opened	2320 mm
Minimum required	3270 mm

Floor area	2.30 m ²
-------------------	---------------------

Total weight	940 kg
---------------------	--------

Baking chamber

Height	1785 mm
Hook rotation speed	5 tr / min

Maximum weight to be carried by the hook	200 kg
---	--------

ENERGY CHARACTERISTICS

Electric power supply

Electrical fan motor	(2 x 0.16) kW
Gear motor	0.18 kW
Lighting	0.12 kW
Miscellaneous	0.03 kW
Exhaust (option)	0.12 kW
Total	0.80 kW

Electric heating power (indicative)	33 kW
--	-------

Connection power	34 kW
-------------------------	-------

Electrical supply	400/230 V TRI + N/50 Hz
--------------------------	-------------------------


Maximum baking temperature	300°C
-----------------------------------	-------

Average gradient of temperature rise per minute	10 to 12°C
--	------------

TRAY SPECIFICATIONS

Type of products	Number of pieces	Levels	Spacing	Dimensions	Baking area
Baguettes 200 g	108	18	89	460 x 800 mm	6.6 m ²
	90	18	89	400 x 800 mm	5.8 m ²
Baguettes 250 g	108	18	89	460 x 800 mm	6.6 m ²
	90	18	89	400 x 800 mm	5.8 m ²
Loaves 400 g	60	15	104	400 x 800 mm	4.8 m ²
	48	12	104	400 x 800 mm	3.8 m ²
French/Danish bakeries	180	18	89	400 x 600 mm	4.3 m ²
	150	15	104	400 x 600 mm	3.6 m ²

ROTARY RACK OVEN

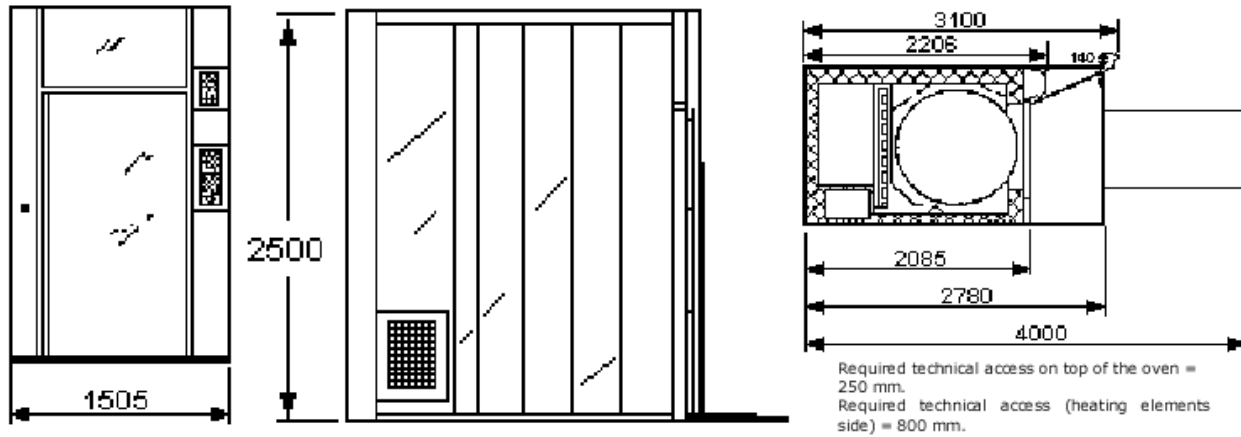

RACK SPECIFICATIONS

	Height	Width	Depth
400 x 800 standard	1790 mm	450 mm	825 mm
460 x 800	1790 mm	510 mm	815 mm