

DECK OVEN

USE

- Baking area : from 5,9 to 23,5 m²
- usefull height on lower decks : 180 mm
- usefull height on upper deck : 180 mm
- Number of levels : 3 or 4
- Door width : 600 or 750 mm
- Number of doors : 1 to 3 per deck
- Power supply : 400 V TRI N+T, 50 Hz (different voltage and frequency possible)

CONSTRUCTION

- Oven front, hood and heating elements in stainless steel
- Special windows to reduce heat loss
- Insulation with by means of glass wool mattresses
- Start up timer
- Equipped with steam extractor for the hood, loader/unloader
- Control panel on right / left side (to be stated at time order)


ACCESSORIES

- Steam vents on each deck
- Baking timer on each deck
- Automatic sequential steam injection
- Integrated lifter

GENERAL FEATURES

Baking chamber height	185 / 240 mm
Door width	600 / 750 mm

Average rise in temperature	2 to 3°C / min
Maximum baking temperature	300°C

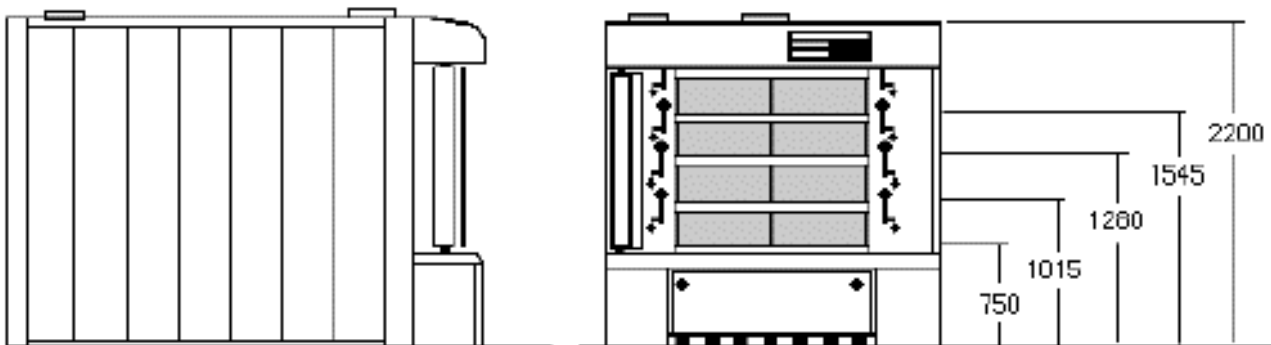

Required technical access on top of the oven = 550 mm.

DECK OVEN : DOOR 600 mm

OVEN MODELS AVAILABLE - GENERAL CHARACTERISTICS

Model	Baking area	Floor area	Overall depth	Overall width	Functional depth	Functional width	Heating power	Electrical supply
601/3-123	2.25 m ²	3.15 m ²	2.22 m	1.42 m	4.4 m	2.22 m	23.5 kW	15.8 kW
601/3-163	2.97 m ²	3.69 m ²	2.60 m	1.42 m	5.1 m	2.22 m	28.0 kW	18.0 kW
601/3-184	3.39 m ²	4.03 m ²	2.84 m	1.42 m	5.4 m	2.22 m	30.2 kW	19.1 kW
601/3-224	4.09 m ²	4.57 m ²	3.22 m	1.42 m	6.1 m	2.22 m	34.6 kW	21.3 kW
601/3-246	4.53 m ²	4.91 m ²	3.46 m	1.42 m	6.7 m	2.22 m	36.9 kW	22.4 kW
601/4-123	3.00 m ²	3.15 m ²	2.22 m	1.42 m	4.4 m	2.22 m	31.0 kW	20.6 kW
601/4-163	3.97 m ²	3.69 m ²	2.60 m	1.42 m	5.1 m	2.22 m	36.9 kW	23.6 kW
601/4-184	4.52 m ²	4.03 m ²	2.84 m	1.42 m	5.4 m	2.22 m	39.9 kW	25.1 kW
601/4-203	4.96 m ²	4.23 m ²	2.98 m	1.42 m	5.9 m	2.22 m	42.8 kW	26.5 kW
601/4-224	5.45 m ²	4.57 m ²	3.22 m	1.42 m	6.1 m	2.22 m	45.8 kW	28.0 kW
601/4-246	6.03 m ²	4.91 m ²	3.46 m	1.42 m	6.7 m	2.22 m	48.7 kW	29.5 kW
602/3-123	4.50 m ²	4.52 m ²	2.22 m	2.04 m	4.4 m	2.84 m	39.1 kW	24.4 kW
602/3-163	5.95 m ²	5.29 m ²	2.60 m	2.04 m	5.1 m	2.84 m	48.0 kW	28.9 kW
602/3-184	6.77 m ²	5.78 m ²	2.84 m	2.04 m	5.4 m	2.84 m	52.4 kW	31.1 kW
602/3-203	7.44 m ²	6.07 m ²	2.98 m	2.04 m	5.9 m	2.84 m	56.8 kW	33.3 kW
602/3-224	8.17 m ²	6.55 m ²	3.22 m	2.04 m	6.1 m	2.84 m	61.3 kW	35.5 kW
602/3-246	9.05 m ²	7.04 m ²	3.46 m	2.04 m	6.7 m	2.84 m	65.7 kW	37.8 kW
602/3-264	9.55 m ²	7.33 m ²	3.60 m	2.04 m	6.9 m	2.84 m	70.2 kW	40.0 kW
602/4-123	6.00 m ²	4.52 m ²	2.22 m	2.04 m	4.4 m	2.84 m	51.5 kW	32.0 kW
602/4-163	7.93 m ²	5.29 m ²	2.60 m	2.04 m	5.1 m	2.84 m	63.4 kW	37.9 kW
602/4-184	9.03 m ²	5.78 m ²	2.84 m	2.04 m	5.4 m	2.84 m	69.3 kW	40.9 kW
602/4-203	9.91 m ²	6.07 m ²	2.98 m	2.04 m	5.9 m	2.84 m	75.2 kW	43.9 kW
602/4-224	10.89 m ²	6.55 m ²	3.22 m	2.04 m	6.1 m	2.84 m	81.1 kW	46.8 kW
602/4-246	12.07 m ²	7.04 m ²	3.46 m	2.04 m	6.7 m	2.84 m	87.1 kW	49.8 kW
602/4-264	12.73 m ²	7.33 m ²	3.60 m	2.04 m	6.9 m	2.84 m	93.0 kW	52.7 kW
603/3-163	8.92 m ²	6.89 m ²	2.60 m	2.65 m	5.1 m	3.45 m	72.3 kW	43.5 kW
603/3-184	10.16 m ²	7.53 m ²	2.84 m	2.65 m	5.4 m	3.45 m	79.0 kW	46.8 kW
603/3-203	11.15 m ²	7.90 m ²	2.98 m	2.65 m	5.9 m	3.45 m	85.6 kW	50.1 kW
603/3-246	13.58 m ²	9.17 m ²	3.46 m	2.65 m	6.7 m	3.45 m	99.0 kW	56.8 kW
603/4-163	11.90 m ²	6.89 m ²	2.60 m	2.65 m	5.1 m	3.45 m	95.8 kW	57.3 kW
603/4-184	13.55 m ²	7.53 m ²	2.84 m	2.65 m	5.4 m	3.45 m	104.6 kW	61.7 kW
603/4-203	14.87 m ²	7.90 m ²	2.98 m	2.65 m	5.9 m	3.45 m	113.5 kW	66.2 kW
603/4-224	16.34 m ²	8.54 m ²	3.22 m	2.65 m	6.1 m	3.45 m	122.4 kW	70.6 kW

Oven model number

60 1 / 3 - 164

A B C D

A : Door width

B : Number of doors/deck

C : Number of decks

D : Baking chamber depth

DECK OVEN : DOOR 750 mm

OVEN MODELS AVAILABLE - GENERAL CHARACTERISTICS

Model	Baking area	Floor area	Overall depth	Overall width	Functional depth	Functional width	Heating power	Electrical supply
751/3-141	2.77 m ²	3.47 m ²	2.22 m	1.56 m	4.4 m	2.36 m	29.1 kW	18.6 kW
751/3-123	2.77 m ²	3.47 m ²	2.22 m	1.56 m	4.4 m	2.36 m	29.1 kW	18.6 kW
751/3-163	3.66 m ²	4.06 m ²	2.60 m	1.56 m	5.1 m	2.36 m	34.4 kW	21.2 kW
751/3-184	4.17 m ²	4.44 m ²	2.84 m	1.56 m	5.4 m	2.36 m	37.0 kW	22.5 kW
751/3-224	5.03 m ²	5.03 m ²	3.22 m	1.56 m	6.1 m	2.36 m	42.3 kW	25.2 kW
751/3-264	5.88 m ²	5.62 m ²	3.60 m	1.56 m	6.9 m	2.36 m	47.6 kW	27.8 kW
751/4-123	3.69 m ²	3.47 m ²	2.22 m	1.56 m	4.4 m	2.36 m	38.4 kW	24.3 kW
751/4-163	4.89 m ²	4.06 m ²	2.60 m	1.56 m	5.1 m	2.36 m	45.5 kW	27.9 kW
751/4-184	5.56 m ²	4.44 m ²	2.84 m	1.56 m	5.4 m	2.36 m	49.0 kW	29.6 kW
751/4-203	6.11 m ²	4.65 m ²	2.98 m	1.56 m	5.9 m	2.36 m	52.5 kW	31.4 kW
751/4-224	6.71 m ²	5.03 m ²	3.22 m	1.56 m	6.1 m	2.36 m	56.0 kW	33.1 kW
751/4-246	7.43 m ²	5.41 m ²	3.46 m	1.56 m	6.7 m	2.36 m	59.5 kW	34.9 kW
751/4-264	7.84 m ²	5.62 m ²	3.60 m	1.56 m	6.9 m	2.36 m	63.1 kW	36.7 kW
752/3-123	5.54 m ²	5.15 m ²	2.22 m	2.32 m	4.4 m	3.12 m	47.2 kW	28.5 kW
752/3-163	7.33 m ²	6.03 m ²	2.60 m	2.32 m	5.1 m	3.12 m	57.8 kW	33.8 kW
752/3-184	8.35 m ²	6.59 m ²	2.84 m	2.32 m	5.4 m	3.12 m	63.1 kW	36.4 kW
752/3-203	9.16 m ²	6.91 m ²	2.98 m	2.32 m	5.9 m	3.12 m	68.4 kW	39.1 kW
752/3-224	10.07 m ²	7.47 m ²	3.22 m	2.32 m	6.1 m	3.12 m	73.6 kW	41.7 kW
752/2-246	11.15 m ²	8.02 m ²	3.46 m	2.32 m	6.7 m	3.12 m	78.9 kW	44.4 kW
752/3-264	11.76 m ²	8.35 m ²	3.60 m	2.32 m	6.9 m	3.12 m	84.2 kW	47.0 kW
752/4-123	7.39 m ²	5.15 m ²	2.22 m	2.32 m	4.4 m	3.12 m	62.4 kW	37.5 kW
752/4-163	9.77 m ²	6.03 m ²	2.60 m	2.32 m	5.1 m	3.12 m	76.5 kW	44.5 kW
752/4-184	11.13 m ²	6.59 m ²	2.84 m	2.32 m	5.4 m	3.12 m	83.5 kW	48.0 kW
752/4-203	12.21 m ²	6.91 m ²	2.98 m	2.32 m	5.9 m	3.12 m	90.6 kW	51.5 kW
752/4-224	13.42 m ²	7.47 m ²	3.22 m	2.32 m	6.1 m	3.12 m	97.6 kW	55.1 kW
752/4-246	14.87 m ²	8.02 m ²	3.46 m	2.32 m	6.7 m	3.12 m	104.7 kW	58.6 kW
752/4-264	15.68 m ²	8.35 m ²	3.60 m	2.32 m	6.9 m	3.12 m	111.7 kW	62.1 kW
753/3-163	10.99 m ²	8.00 m ²	2.60 m	3.08 m	5.1 m	3.88 m	85.9 kW	50.2 kW
753/3-184	12.52 m ²	8.73 m ²	2.84 m	3.08 m	5.4 m	3.88 m	93.8 kW	54.2 kW
753/3-203	13.74 m ²	9.17 m ²	2.98 m	3.08 m	5.9 m	3.88 m	101.7 kW	58.2 kW
753/3-224	15.10 m ²	9.91 m ²	3.22 m	3.08 m	6.1 m	3.88 m	109.6 kW	62.1 kW
753/3-246	16.73 m ²	10.64 m ²	3.46 m	3.08 m	6.7 m	3.88 m	117.6 kW	66.1 kW
753/3-264	17.64 m ²	11.08 m ²	3.60 m	3.08 m	6.9 m	3.88 m	125.5 kW	70.0 kW
753/1-163	14.66 m ²	8.00 m ²	2.60 m	3.08 m	5.1 m	3.88 m	113.8 kW	66.3 kW
753/4-184	16.69 m ²	8.73 m ²	2.84 m	3.08 m	5.4 m	3.88 m	124.4 kW	71.6 kW
753/4-203	18.32 m ²	9.17 m ²	2.98 m	3.08 m	5.9 m	3.88 m	135.0 kW	76.9 kW
753/4-224	20.13 m ²	9.91 m ²	3.22 m	3.08 m	6.1 m	3.88 m	145.5 kW	82.2 kW
753/4-246	22.30 m ²	10.64 m ²	3.46 m	3.08 m	6.7 m	3.88 m	156.1 kW	87.4 kW
753/4-264	23.52 m ²	11.08 m ²	3.60 m	3.08 m	6.9 m	3.88 m	166.6 kW	92.7 kW

Oven model number

75 1 / 3 - 264

A B C D

A : Door width

B : Number of doors/deck

C : Number of decks

D : Baking chamber depth